

EP-16


Multi Props



| COD | MOD | + ↑↓ | ↑↓ | Kg | |
|-------|----------|---------|--------|------|---|
| 34000 | Puntal 0 | 60cm. | 40cm. | 1,10 | 5 |
| 30010 | Puntal 1 | 100cm. | 60cm. | 1,36 | |
| 30011 | Puntal 2 | 170cm. | 95cm. | 1,38 | |
| 30012 | Puntal 3 | 290cm. | 155cm. | 2,61 | |
| 34004 | Puntal 4 | 375cm. | 200cm. | 3,18 | |

*** Cuadro de fuerzas Pressure table**

| COD | 34000 | 30010 | 30011 | 30012 | 34004 |
|---------|----------|----------|----------|----------|----------|
| MOD | Puntal 0 | Puntal 1 | Puntal 2 | Puntal 3 | Puntal 4 |
| 40 cm. | 450 kg. | | | | |
| 60 cm. | 450 kg. | 450 kg. | | | |
| 100 cm. | | 450 kg. | 450 kg. | | |
| 155 cm. | | | 450 kg. | 450 kg. | |
| 170 cm. | | | 300 kg. | 450 kg. | |
| 200 cm. | | | | 450 kg. | 450 kg. |
| 250 cm. | | | | 220 kg. | 350 kg. |
| 290 cm. | | | | | 150 kg. |
| 300 cm. | | | | | 200 kg. |
| 325 cm. | | | | | 150 kg. |
| 350 cm. | | | | | 90 kg. |
| 375 cm. | | | | | 70 kg. |

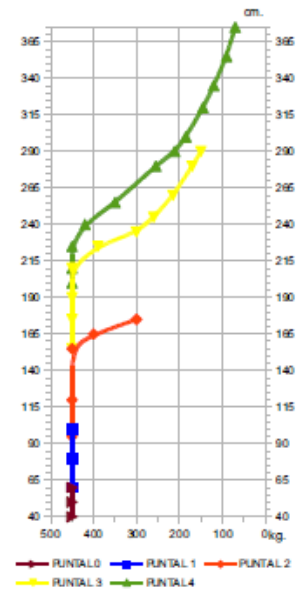

Main features:

- New patented instant locking system
- Spring mechanism for quick locking
- screw adjusted pressure
- Non-slip pads adjustable for use at different angles
- Easy to use

Materials and Finishing:

All raw materials without exception used in Ind. Piqueras tools come from countries within the European Union. This guarantees maximum quality and permits easy and full control.

| | |
|--------|---|
| TUBES | *30x1 mm tube E-220 quality.Follows ruling EN-10130. Phospated and epoxy-polyester painted electrostatically in a rough grey colour. *25x1 mm tube DX51DZ quality following ruling EN10327 galvanised |
| HANDLE | *Nylon and fibre glass handle |
| P ADS | *Non-slip EVA pad cover *Interior thick white zinc plated metal plate 3,5 mm without hexavalent Chromium *Screw axles 12,9 quality DIN912,white zinc plated without hexavalent Chromium |
| BRAKES | *Four tempered white zinc plated steel plates without hexavalent Chromium. *Spring steel white zinc plated operating mechanism without hexavalent Chromium |
| SCREW | *White zinc coated steel without Hexavalent-Chromium |

The careful design also guarantees optimum mechanical performance.

Packing and labelling:

In cling film boxed packets of five
Individually coded label EAN-13

RULES:

No special safety rulings applied
All work carried out following ISO:9001 and ISO :14001 rules