

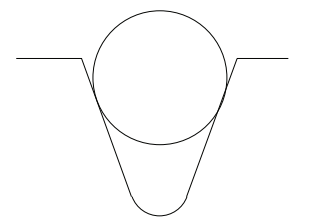


FEED ROLL SELECTOR CHART


SHAPE	STOCK CODE	GROOVE	WIRE SIZES MM (INCH)	WIRE	XTE 171C	XTE 181C	XTE 201C	XTM 161I	XTM 201I	XTM 201DI	XTM 211DI	XTM 255I	XTM 256I	XTM 356I	XTM 304C	XTM 404S	XTM 503I	
					■	■	■											
A	XTEFR0809	Plain V	0.8-0.9mm (.030"-.035")	Fe, Ss	■	■	■											
	XTEFR0810		0.8-1.0mm (.030"-.040")		■	■	■											
	XTEFR0809F	Knurled V	0.8-0.9mm (.030"-.035")	FC	■	■	■											
	XTEFR0810F		0.8-1.0mm (.030"-.040")		■	■	■											
	XTEFR0809A	Plain U	0.8-0.9mm (.030"-.035")	Al	■	■	■											
	XTEFR0810A		0.8-1.0mm (.030"-.040")		■	■	■											
B	DR4V0608	Plain V	0.6-0.8mm (.023"-.030")	Fe, Ss											■	■		
	DR4V0809		0.8-0.9mm (.030"-.035")													■	■	
	DR4V0810		0.8-1.0mm (.030"-.040")													■	■	
	DR4K0608	Knurled V	0.6-0.8mm (.023"-.030")	FC											■	■		
	DR4K0809		0.8-0.9mm (.030"-.035")												■	■		
	DR4K0810		0.8-1.0mm (.030"-.040")												■	■		
	DR4U0809	Plain U	0.8-0.9mm (.030"-.035")	Al											■	■		
	DR4U0810		0.8-1.0mm (.030"-.040")												■	■		
C	DR5V0608	Plain V	0.6-0.8mm (.023"-.030")	Fe, Ss								■	■	■				
	DR5V0810		0.8-1.0mm (.030"-.040")										■	■	■			
	DR5V0910		0.9-1.0mm (.035"-.040")										■	■	■			
	DR5V1012		1.0-1.2mm (.040"-.045")										■	■	■			
	DR5V1216	1.2-1.6mm (.045"-1/16")									■	■	■					
	DR5K0608	Knurled V	0.6-0.8mm (.023"-.030")	FC								■	■	■				
	DR5K0810		0.8-1.0mm (.030"-.040")									■	■	■				
	DR5K1012		1.0-1.2mm (.040"-.045")										■	■	■			
	DR5K1216		1.2-1.6mm (.045"-1/16")										■	■	■			
	DR5U0608	Plain U	0.6-0.8mm (.023"-.030")	Al								■	■	■				
	DR5U0910		0.9-1.0mm (.035"-.040")									■	■	■				
	DR5U1012		1.0-1.2mm (.040"-.045")										■	■	■			
	DR5U1216		1.2-1.6mm (.045"-1/16")										■	■	■			
	D	DR2V0608	Plain V	0.6-0.8mm (.023"-.030")	Fe, Ss				■	■	■	■						
DR2V0609		0.6-0.9mm (.025"-.035")						■	■	■	■							
DR2V1012		1.0-1.2mm (.040"-.045")						■	■	■	■							
DR2K0809		Knurled V	0.8-0.9mm (.030"-.035")	FC				■	■	■	■							
DR2K1012			1.0-1.2mm (.040"-.045")					■	■	■	■							
DR2U0809		Plain U	0.8-0.9mm (.030"-.035")	Al				■	■	■	■							
DR2U1012			1.0-1.2mm (.040"-.045")					■	■	■	■							
E	XTFRV0608	Plain V	0.6-0.8mm (.023"-.030")	Fe, Ss													■	
	XTFRV0810		0.8-1.0mm (.030"-.040")															■
	XTFRV1012		1.0-1.2mm (.040"-.045")															■
	XTFRV1216		1.2-1.6mm (.045"-1/16")															■
	XTFRU0810A	Plain U	0.8-1.0mm (.030"-.040")	Al														■
	XTFRU1012A		1.0-1.2mm (.040"-.045")															■
	XTFRU1216A		1.2-1.6mm (.045"-1/16")															■
	XTFRK1012K		Knurled V		1.0-1.2mm (.040"-.045")	FC												

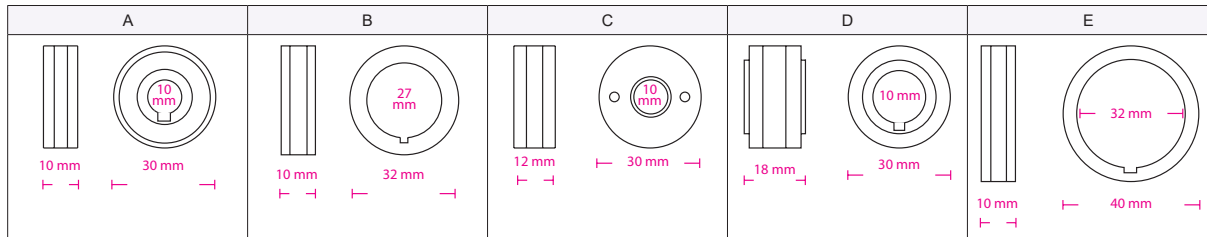

V Groove for Solid wires

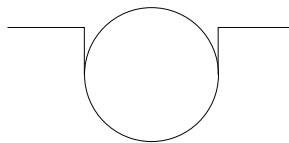

U Groove for soft wires (Aluminium)

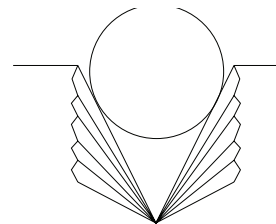

Knurled (R) Groove for flux core wires